

Anglia Composites Ltd

COMPOSITE SAFETY SOLUTIONS

SAFETY GATES PRICE LIST 2007

All gates are double bar gates to conform to EN-ISO 14122 part 3:2001 and part 4:2005. Our corrosion resistant gates are self closing and have a knee rail and a handrail. All gates are shipped fully assembled including attachment. Double bar gates only need one hinge.


All prices are subject to delivery charges and VAT at the current rate.

<u>Opening</u>	<u>Item No.</u>	<u>Cost £</u>
120-555	22L or 22R	210.00
556-685	27L or 27R	215.00
686-810	32L or 32R	220.00
811-940	37L or 37R	225.00




SAFETY GATE INSTALLATION INSTRUCTIONS

- Make sure the blades of the gate are long enough to contact and extend past opposite side guardrail post by 25mm minimum.
- The support block is mounted below the top rail of the gate to prevent vertical deflection. It should not make contact with the gate or interfere with it opening or closing.
- The top rail of the gate should be no more than 1100mm above platform surface.
- If the gate is to be attached to a tubular handrail it will be necessary to weld or bolt a plate to the inside top corners to accept the hinge and support block.

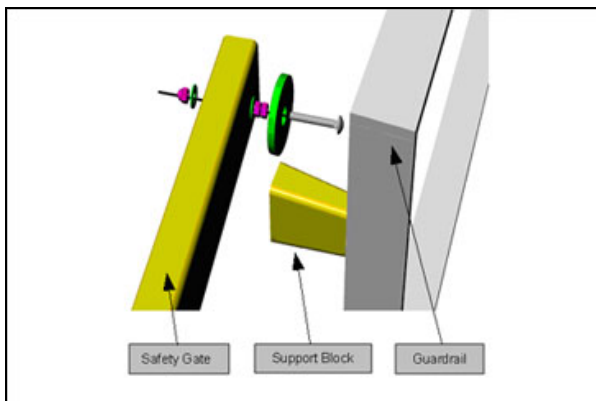

Magnetic 'HOLDTIGHT' kit available at £20.00

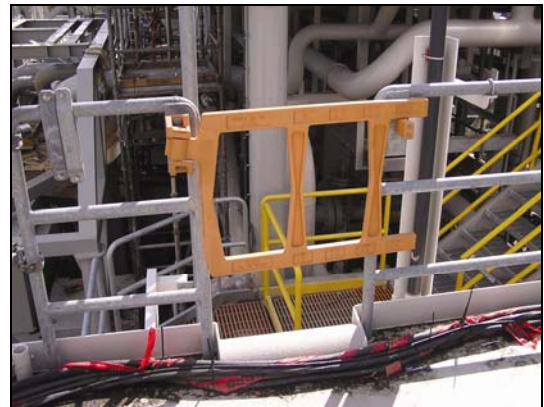

Anglia Composites Ltd Unit 5 Stour Valley Business Centre Brundon Lane Sudbury Suffolk
CO10 7GB Tel: 01787 377322 Fax: 01787 377433 Mob:07791 269180
Web: www.angliacomposites.co.uk Email: info@angliacomposites.co.uk